



Next Generation Wi-Fi



Dual-Band



Windows 8 Compatible



Mac OS X Compatible

EW-7811UTC


AC600 Wireless Dual-Band Mini USB Adapter

Overview

The next generation 802.11ac wireless standard is set to revolutionize Wi-Fi. Super-speed 802.11ac dual-band routers are already available but wireless devices are still stuck with 802.11n technology. Upgrade your wireless device to dual-band 802.11ac with the fastest possible USB 2.0 connectivity for blistering Wi-Fi speeds on the interference free 5Ghz frequency band.

Next Generation Wi-Fi Standard

The Edimax EW-7811UTC is the next generation of Wi-Fi adapter, compatible with the draft 802.11ac standard and delivering speeds of up to 433Mbps at 5GHz - almost three times as fast as 802.11n. Upgrade PCs and notebooks to super high speed 802.11ac Wi-Fi and enjoy streaming video and data.

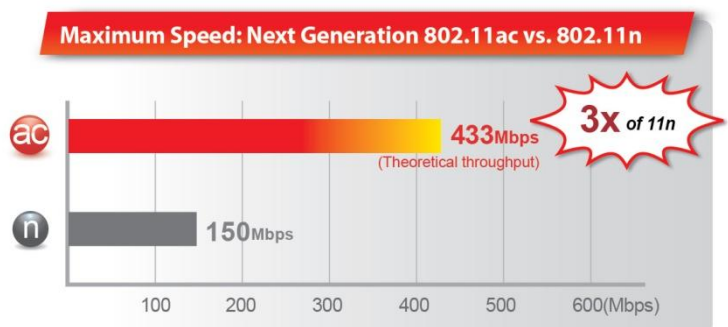

Dual-Band Connectivity

Enjoy better performance and greater flexibility for your Wi-Fi devices, using dual-band connectivity. The EW-7811UTC provides connectivity for the 2.4GHz band at speeds of 150Mbps or 5Ghz band at speeds of 433Mbps. You can surf the internet and check your email on the 2.4GHz band, or select the 5GHz band for online gaming and video streaming.



AC600 Wireless Dual-Band Mini USB Adapter

EW-7811UTC

Download and Stream Anywhere

Use the EW-7811UTC to download and stream media from YouTube, Netflix or other services without waiting for buffering, or stream media across your network from a NAS (network-attached storage) at lightning speeds. Streaming HD movies or downloading is faster and more reliable than ever with 802.11ac Wi-Fi.



Compact & Convenient

Designed for efficiency and performance, the mini-sized adapter is lightweight, sleek and portable. Incorporating 11ac technology into users' lifestyles and unlocking a new world of potential Wi-Fi applications, the low-profile mini-adapter sits almost unnoticed in any USB drive and travels with your laptop wherever your lifestyle takes it.



Wi-Fi Protected Setup (WPS) Button

The EW-7811UTC has a one-click Wi-Fi Protected Setup (WPS) button to help you set up and activate a secure wireless network in a snap.



AC600 Wireless Dual-Band Mini USB Adapter

EW-7811UTC

FEATURES

- Complies with draft IEEE 802.11ac standard and backward compatible with wireless 802.11a/b/g/n standards
- Dual-band wireless connectivity for 2.4GHz or 5GHz
- Maximum Wi-Fi speeds of 150Mbps (2.4GHz) or 433Mbps (5GHz)
- Features a hardware WPS (Wi-Fi Protected Setup) button for easy wireless connections
- Features easy setup wizard
- Supports Windows XP/Vista/7/8, Linux and Mac OS X drivers

TECHNICAL SPECIFICATIONS

Hardware	Standards	Frequency Band
<ul style="list-style-type: none"> • 1 x USB 2.0 Type A • 1 x Hardware WPS Button • 1 x Link/Activity LED 	<ul style="list-style-type: none"> • 2.4GHz: IEEE 802.11b, 802.11g, 802.11n • 5GHz: IEEE 802.11ac (Draft), 802.11a, 802.11n 	<ul style="list-style-type: none"> • 2.4000 - 2.4835GHz (subject to local regulations) • 5.150 - 5.825GHz (subject to local regulations)
Output Power	Installation	Operating Range
<ul style="list-style-type: none"> • 2.4GHz <ul style="list-style-type: none"> 11b (11Mbps): 16dBm±1.5dBm 11g (54Mbps): 14dBm±1.5dBm 11n (20MHz, MCS7): 14dBm±1.5dBm 11n (40MHz, MCS7): 14dBm±1.5dBm • 5GHz <ul style="list-style-type: none"> 11a (54Mbps): 12dBm±1.5dBm 11n (20MHz, MCS7): 12dBm±1.5dBm 11n (40MHz, MCS7): 12dBm±1.5dBm 11ac (80MHz, MCS9): 10dBm±1.5dBm 	<ul style="list-style-type: none"> • Easy setup wizard • Hardware WPS Button for easy wireless connections 	<ul style="list-style-type: none"> • 11a: 6/9/12/24/36/48/54Mbps • 11b: 1/2/5.5/11Mbps • 11g: 6/9/12/24/36/48/54Mbps • 11n (20MHz): MCS0-7 (up to 72Mbps) • 11n (40MHz): MCS0-7 (up to 144Mbps) • 11ac (80MHz): MCS0-9 (up to 433Mbps)
LEDs	Security	Temperature & Humidity
<ul style="list-style-type: none"> • Link/Activity 	<ul style="list-style-type: none"> • WEP 64/128-bit, WPA, WPA2, 802.1x • Hardware & Software WPS Configuration 	<ul style="list-style-type: none"> • Max 95% (non-condensing) • 32 - 104°F (0 - 40°C)
Weight	Dimensions	Certifications
<ul style="list-style-type: none"> • 3g 	<ul style="list-style-type: none"> • 40(H) x 16(W) x 7(D) mm 	<ul style="list-style-type: none"> • CE/FCC

APPLICATION DIAGRAM

